

MA-1408

Pre Amplifier




FEATURES

- Chime Signal
 - Selective 2 tone/4 tone chime.(internal setting)
 - Automatic Priority.
 - Permissible external chime remote and P.T.T Remote.
- 8 input / 2 zone output pre-amp mixer.
- Two band EQ per output.
- Signal indicator per input.
- Independent din jack for P.T.T Remote(PTT-100)
- Priority switch and phantom of MIC 2,3
- Selective mic input of H.P.F
- Selective output for per input signal (output 1,output 1+2, output 2)
- Independent line input with RCA pin jack(Line 6-8)
- Recording output.
- LED indicator for master-output.
- AC/DC 24V

TECHNICAL SPECIFICATIONS

Input sensitivity impedance	MIC/LINE : -50dBu(2.45mV)/5kΩ bal
	-10dBu(245mV)/5kΩ bal
	LINE RCA IN : -10dBu(245mV)10kΩ unbal
Output level impedance	Master L, R : Nor +4dBu(1.23V)/200Ω bal
	REC : Nor 0dBu(0.775V)10kΩ unbal
Frequency response	Less than -0.5dB (20Hz ~20kHz)
Signal to noise ratio	MIC : More than 60dB
	LINE : More than 75dB
T.H.D at 1kHz	MIC : Less than 0.05%
	LINE : Less than 0.03%
Cross-talk	MIC : More than 60dB
	LINE : More than 75dB
Power consumption	9.9W
Power	Free voltage(120V~240V AC)
Dimensions(m/m)	483(W) x 44(H) x 200(D)m/m
Weight (kg)	3.9kg

REAR VIEW

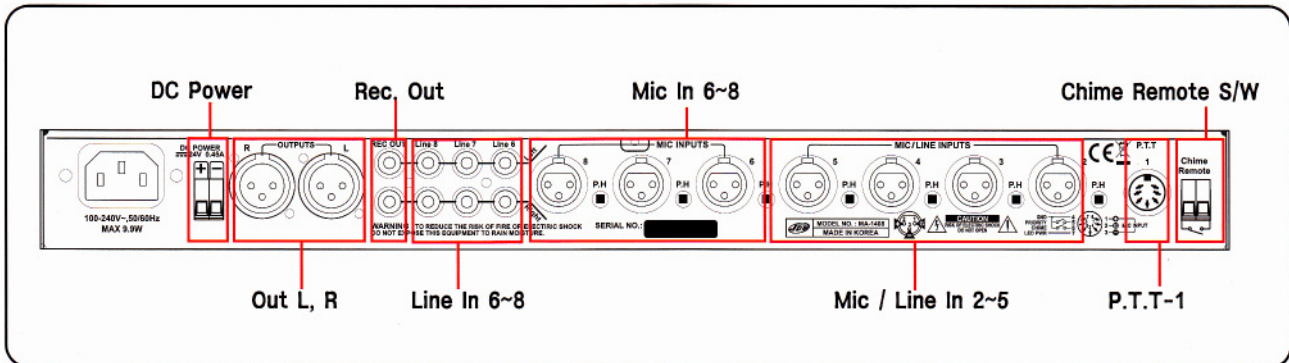

PTT-100 (Option) P.T.T Remote



DRAWING

