

# MA-1410

## Pre Amplifier




### FEATURES

- 1/4" TRS phone jack for monitor of channel input.
- 2 individual XLR balanced master-outputs with bass/treble and LED indicators.
- 10 input / 2 zone output pre-amp mixer.
- Line/Mic/Mic-lowcut with phantom selector on each channel.
- Automatic priority for channel 1-3.
- 10 channels with individual master-output selector (output 1, output 1+2, output 2).
- High Pass Filter.
- AC operation - DC 24V operation.
- Input signal indicator.
- Recording output.
- DIN connection for P.T.T. remote on ch.1 (PTT-100).
- Signal input by XLR (2-10) & RCA channel 7-10.
- 4 or 2 tone chime with internal tone selector.

### TECHNICAL SPECIFICATIONS

Input sensitivity impedance	MIC/LINE : -50dBu(2.45mV/5kΩ bal
	-10dBu(245mV)/5kΩ bal
	LINE RCA IN : -10dBu(245mV)10kΩ unbal
Output level impedance	Master 1, 2 : Nor +4dBu(1.23V)/200Ω bal
	REC : Nor 0dBu(0.775V)10kΩ unbal
Frequency response	Less than -0.5dB (20Hz ~20kHz)
Signal to noise ratio	MIC : More than 60dB
	LINE : More than 75dB
T.H.D at 1kHz	MIC : Less than 0.04%
	LINE : Less than 0.02%
Cross-talk	MIC : More than 60dB
	LINE : More than 75dB
Power consumption	9.9W
Power	AC230V/50Hz, DC24V
Dimensions(mm)	483(W) x 44(H) x 200(D)/m/m
Weight(kg)	4kg

### REAR VIEW

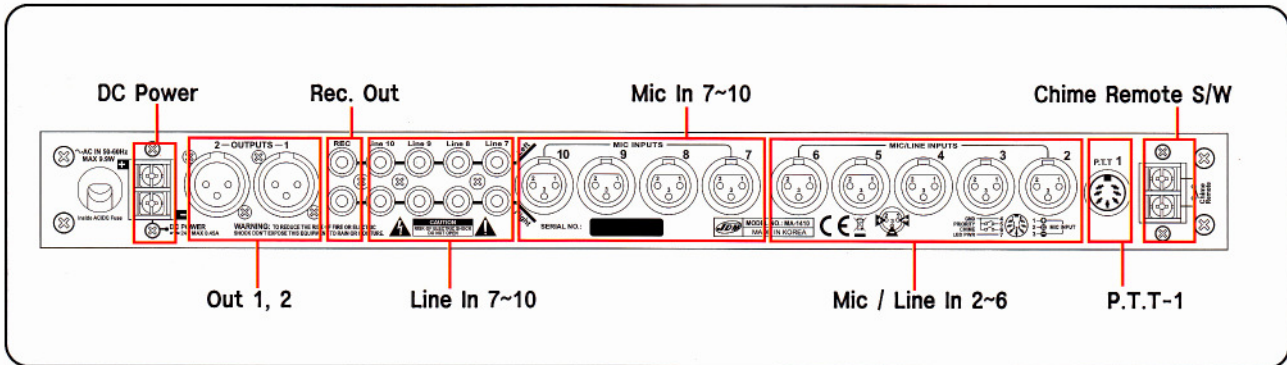

### PTT-100 (Option)

P.T.T Remote



### DRAWING

