


MU-2307

Monitor Unit

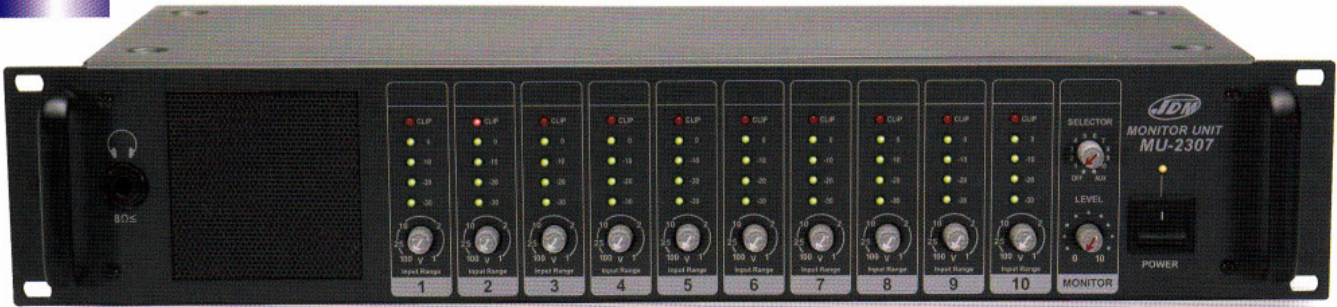


FEATURES

- Permissible monitor for 10pcs-power Amplifier output by monitor selector.
- Level adjustment of input level for each monitor.
- Permissible signal input 1V~100V according to setting for monitor input.
- LED meter per monitor input.
- 2 way monitors by speaker built-in or headphone.
- No problem by potential difference between MU-2307 and product unbalanced. Due to balanced input circuit.
- AUX input for monitor of pre AMP out.
- Monitoring up to 10 channels with individual LED meters.
- Variable Input signal ranges from 1V to 100V.
- Monitoring pre-amp out by extra aux input.
- Input level Monitor adjustment.
- +/- input and GND of circuit is insulated.

TECHNICAL SPECIFICATIONS

Input sensitivity/Impedance	1V-100V / 10kΩ bal.
Rated monitor	speaker : 2W max.
	headphone : 0.1W max.
Frequency response	Less than -3dB (100Hz ~ 20kHz)
T.H.D(1kHz)	Less than 0.04%
Power consumption	12W(all operation)
	8.5W(1ch operation)
Power (Option)	AC230V/50Hz, 24VDC
Dimensions(m/m)	483(W) x 88(H) x 200(D)m/m
Weight (kg)	4.8kg

REAR VIEW

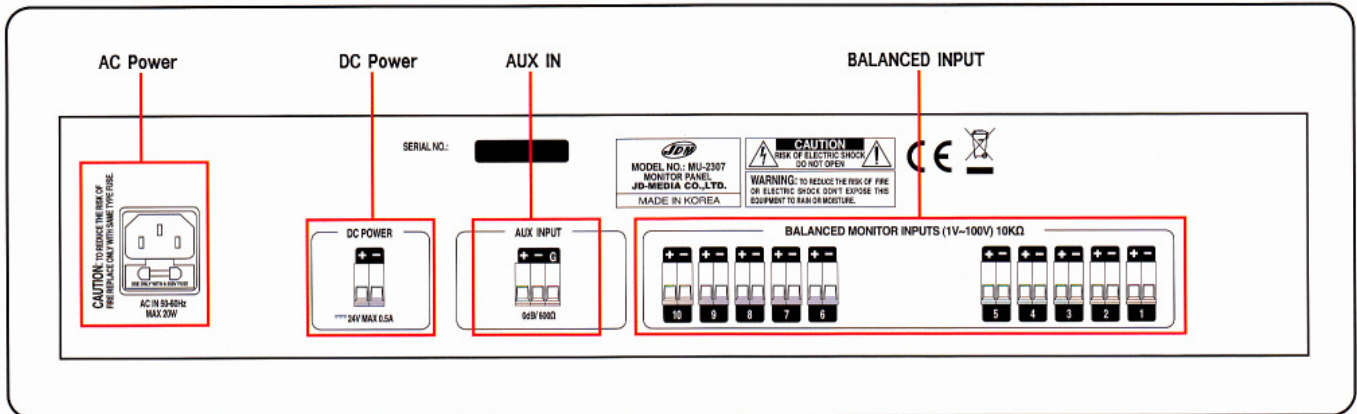

DRAWING

