


RG-3220


Relay Group

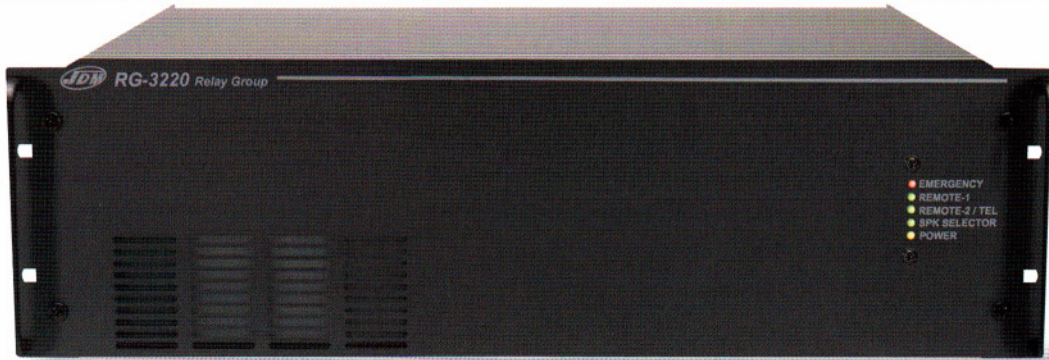

FEATURES

- Speaker lines are controlled by relay that is operated according to command procedure of signal of diode matrix built in.
- Priority announcement are E/M speaker selector, remote amplifier, speaker selector and users can check current situation by LED indicator.
- Matrix style of speaker line controls for E/M speaker selector and amplifier to be easy speaker system configuration.
- Speaker line control per zone announcement of remote amplifier.
- Built-in one signal exchanger circuit.
- Built in amplifier priority.
- Design to be extendible relay group.
- Module styly E/M. remote-1, remote-2, telephone paging card to use
- proper system configurations.
- Consist of speaker line for RG-3220 is two-line way for normal announcement, three-line way for emergency announcement, four-line way, main and local amplifier two-way.
- Method of control between remote amplifier and relay group is data circuit with RS-485. Permissible communication.(MAX 1Km)

REAR VIEW

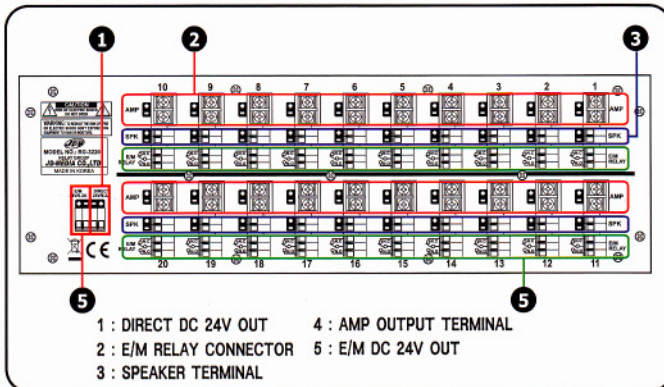

TECHNICAL SPECIFICATIONS

Speaker controls	20 lines
Signal exchanger circuit	1 circuit
Speaker line connection	2-wire, ATT. 3-wire, ATT. 4-wire.
	Low Imp AMP 2-wire Main & Local AMP ATT.2-wire
Power consumption	12W
Power	DC 24V
Dimensions(m/m)	483(W) x 133(H) x 350(D)m/m
Weight(kg)	8.6kg

SPEAKER CONNECTION EXAMPLE

