


Description

These weatherproof horn speakers provide performance even in the harshest environments. Straight and ultra high power horns give a highly articulate sound performance in high noise areas or at large gatherings of people

Please consider the following features:

- The complete construction of the horn speakers series has the ultimate protection grade, IP 66.
- The 2-pole connection cable (flexible hose line) is led through a waterproof PG-screw joint .
- The 6-step impedance is switchable with a screwdriver at the rear side of the unit.

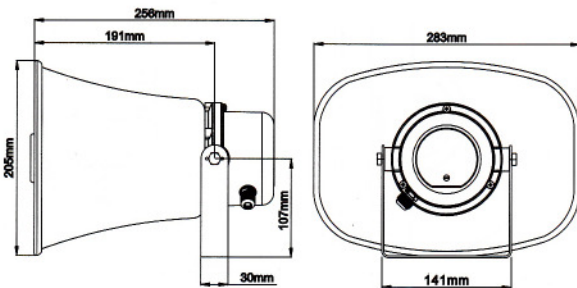

Technical data SC-20

Load rating	20W
Input impedance	500-670K-1K-2K-3.3K-10K ohms
Frequency range	350Hz-5KHz
Output power	20-15-10-5-3-1W
SPL(@1W/m)	107 dB
Dimension W×H×L	205x283x256 mm
Horn material	ABS
Horn flat material	Die-cast Aluminium
Cover material	ABS

Technical data SC-30

Load rating	30W
Input impedance	330-670-1K-2K-3.3K-10K ohms
Frequency range	350Hz-5KHz
Output power	30-15-10-5-3-1W
SPL(@1W/m)	108 dB
Dimension W×H×L	205x283x256 mm
Horn material	ABS
Horn flat material	Die-cast Aluminium
Cover material	ABS