


FEATURES

- Automatic convertible AC power to DC power when unexpected AC powers failure.
- Protection circuitry for battery against over current, over voltage.
- Battery built-in or use of battery from outside.(extended battery)
- An airtight battery built-in makes not leakage of gas when recharging.
- Automatic battery charge and discharge.
- Built-in fuse for 24V DC per output.
- Protection circuit against msiconnecting of "+, -" polarity.
- LED indicator for battery charge.
- It makes buzzer sound in case of on AC power SUPPLY under battery rechargeable or rechargeable circuit has a fault.

TECHNICAL SPECIFICATIONS

Charging off	Aprox. 27.3V DC
Charging current	2.5A limited
Power consumption	105W
Power(option)	AC230V/50Hz, DC24V
Dimensions(m/m)	483(W) x 133(H) x 377(D)m/m
Weight(kg)	built-in battery 30kg
	not built-in battery 12kg
Battery	
Dimensions(m/m)	175(W) x 125(H) x 166(D)m/m
Capacity	12V / 24AH x 2

DRAWING

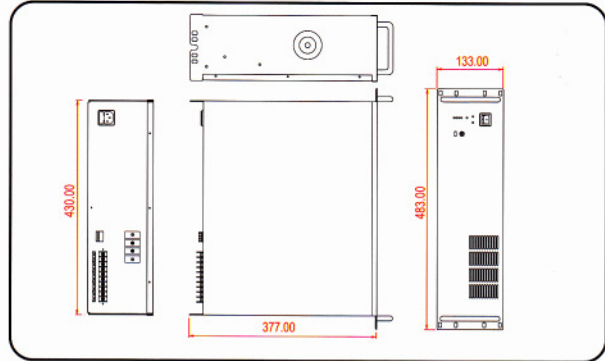

REAR VIEW

